


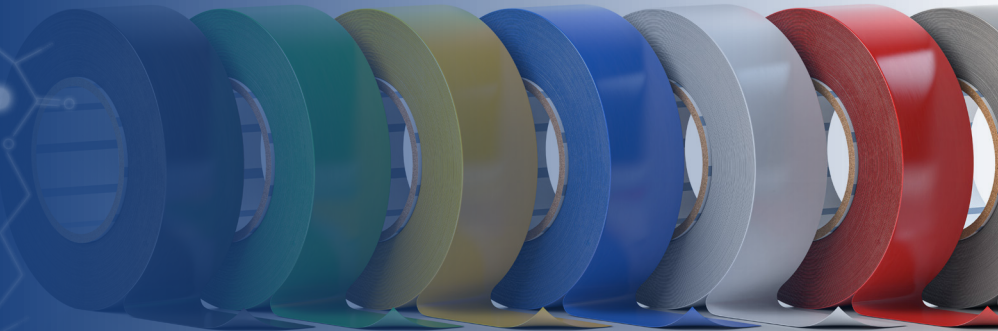

HIGH-PERFORMANCE ADHESIVES AND SEALANTS

Product	Chemistry	Application						Performance			Properties		
		Permanent PSAs	Removable PSAs	Tape and Labels	Protective Masking	Vinyl Flooring Adhesive	Caulks and Sealants	Peel	Shear	Tack	Solids (%)	pH	Tg (°C)
EPS® 2121D	All-Acrylic		●	●	●			Low	High	Moderate	50	7.0-8.0	-32
EPS® 2123D	Styrenated Acrylic		●	●	●			Low	High	Moderate	52	7.0-9.0	-34
EPS® 2156D	All-Acrylic		●	●	●			Low	High	Moderate	55	7.0-9.0	-41
EPS® 2157D	All-Acrylic		●	●	●			Moderate	High	Moderate	52	6.0-8.0	-40
EPS® 2252*	All-Acrylic	●						High	Low	High	60	8.0-9.0	-32
EPS® 2127D	All-Acrylic	●		●	●		●	High	Moderate	High	60	8.0-9.0	-45
EPS® 2133	All-Acrylic	●	●	●	●	●	●	Moderate	High	High	57	7.0-8.0	-34
EPS® 2224	All-Acrylic						●	-	-	-	58	3.5-5.5	-11

D = Low foaming

*Adhesion to low energy substrates

THE EXPERTISE BEHIND THE INNOVATION

The data on this sheet represents typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. EPS assumes no obligation or liability for use of this information. UNLESS EPS AGREES OTHERWISE IN WRITING, EPS MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR

PURPOSE OR FREEDOM FROM PATENT INFRINGEMENT. EPS WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option. Unless otherwise agreed in writing, all sales of EPS products are governed by the EPS Terms and Conditions of Sale, available at www.epscca.com/galleries/pdfs/salesterms.pdf.

CONTACT INFORMATION

EPS Headquarters
1400 N. State St.
Marengo, Illinois 60152

Sales and Customer Service
Phone: 800-654-4242
Email: info@epscca.com

EPS Technical Service
Phone: 800-654-4242
Email: info@eps-materials.com

epscca.com