



SPORT COURT AND FIELD MARKING


Product	Chemistry	Substrate	Application						Properties			Performance Benefits
			Primers and Resurfacers	Cushion Coats	Finish Coats	Field and Line Markings	Crack Fillers and Patching Compounds	Concrete Topcoats	Solids (%)	pH	MFFT (°C)	
EPS® 2719	All-Acrylic	Asphalt, Metal	•						55	8.0-8.5	4 (Tg)	- Asphalt bleed-through resistance - Dirt pickup resistance - Adhesion - Excellent toughness with both high tensile strength and elongation
EPS® 2708	All-Acrylic	Concrete, Exterior Wall, Interior Wall, Wood	•		•	•			50	8.0-9.0	20	- High alkali stability - Abrasion resistance - Adhesion, durability and flexibility - Good balance of flexibility and hardness
EPS® 2763	All-Acrylic	Asphalt, Concrete		•					58	8.0	0	Flexibility and adhesion to rubber fillers
EPS® 2736	All-Acrylic			•					58.5	8.0-9.0	10-12	- High solids - Early water and dirt pickup resistance - Adhesion to asphalt and concrete - Abrasion resistance - High elongation
RayCryl® 1244	All-Acrylic	Topcoat		•	•				50	8.0-9.0	0	- UV resistance - Abrasion resistance - Early blister resistance - Sand retention
EPS® 2545	Styrenated Acrylic	Asphalt, Concrete, Exterior Wall, Interior Wall, Masonry/Stucco, Metal, Wood			•				30	9.0-10.0	1	- Early water resistance - Alkali strippable - Temporary markings
EPS® 2293	All-Acrylic	Concrete, Masonry/Stucco, Wood					•		40	8.0-9.0	<10	- Blush and chemical resistance - Early water resistance - Exterior durability - Gloss development and retention



SPORT COURT AND FIELD MARKING

Product	Chemistry	Substrate	Application					Properties			Performance Benefits
			Primers and Resurfacers	Cushion Coats	Finish Coats	Field and Line Markings	Crack Fillers and Patching Compounds	Solids (%)	pH	MFFT (°C)	
RayCryl® 1008	All-Acrylic	Concrete					•	45	8.5-9.5	16	• Hardness • Dirt pickup and water resistance • Hot tire pickup resistance • Resistant to garage and household chemicals • Blush resistance
EPS® 2103	All-Acrylic	-				•		46.5	8.5-9.5	7	• Strength and flexibility • Dirt pickup resistance • Alkali stability • Flexibility • Low odor
EPS® 2224	All-Acrylic	Concrete, Masonry/Stucco, Metal, Wood				•		58	3.5-5.5	-11 (Tg)	• Dirt pickup resistance • Alkali and water resistance • Adhesion • Flexibility

Adhesion Bleed-Through Resistance
Flexibility Hardness Early Water Resistance
Durability Strength
Abrasion Resistance Chemical Resistance Exterior
Blush Resistance Dirt Pickup Resistance Early Blister Resistance

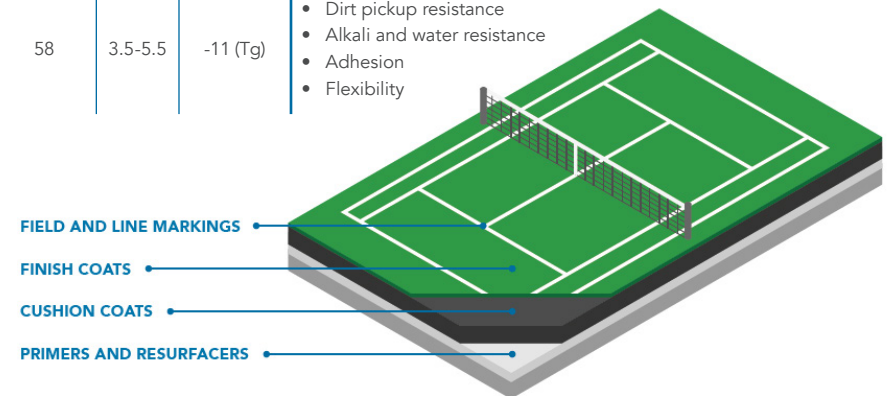

THE EXPERTISE BEHIND THE INNOVATION

The data on this sheet represents typical values. Since application variables are a major factor in product performance, this information should serve only as a general guide. EPS assumes no obligation or liability for use of this information. UNLESS EPS AGREES OTHERWISE IN WRITING, EPS MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AND DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR FREEDOM FROM PATENT INFRINGEMENT. EPS WILL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Your only remedy for any defect in this product is the replacement of the defective product, or a refund of its purchase price, at our option. Unless otherwise agreed in writing, all sales of EPS products are governed by the EPS Terms and Conditions of Sale, available at <https://www.epscsa.com/galleries/pdfs/salesterms.pdf>.

CONTACT INFORMATION

EPS Headquarters
1400 N. State St.
Marengo, Illinois 60152

Sales and Customer Service
Phone: 800-654-4242
Email: info@epscsa.com

EPS Technical Service
Phone: 800-654-4242
Email: info@eps-materials.com

epscsa.com